



Industry Automation



PRE 500 RS

Technical Features

Main Jumbo Roll 550 mm (22") width
Jumbo Roll Thickness 10 to 35 micron
Jumbo Roll for reinforcement from 180 to 500 mm (7" to 22") width
Cardboard Cores Standard 76mm (3")
Jumbo Roll loading by electric lift carriage

Production speed

- pre-stretched with reinforcement strips up to 1000 mt/min
- only pre-stretched up to 1000 m/min

Finished Roll Change System Shaftless

Finished Roll Max Diameter 280 mm (11")
Mandrels 38 - 50 - 76 mm (1,5" - 2" - 3")

Winding Tension Adjustable with automatic compensation

Folding Edge

Oscillating System Film adjustable in frequency and amplitude.


Diagnostic System - New Visual Diagnostic and Teleassistance connection

Operator Panel 10" Color touch screen

Air Supply 8 bar (161 psi) 200NI/min

Electric Supply 3P 400/440 V, 50-60 Hz 34 kW (12 kW avg)

Weight 4200 Kg

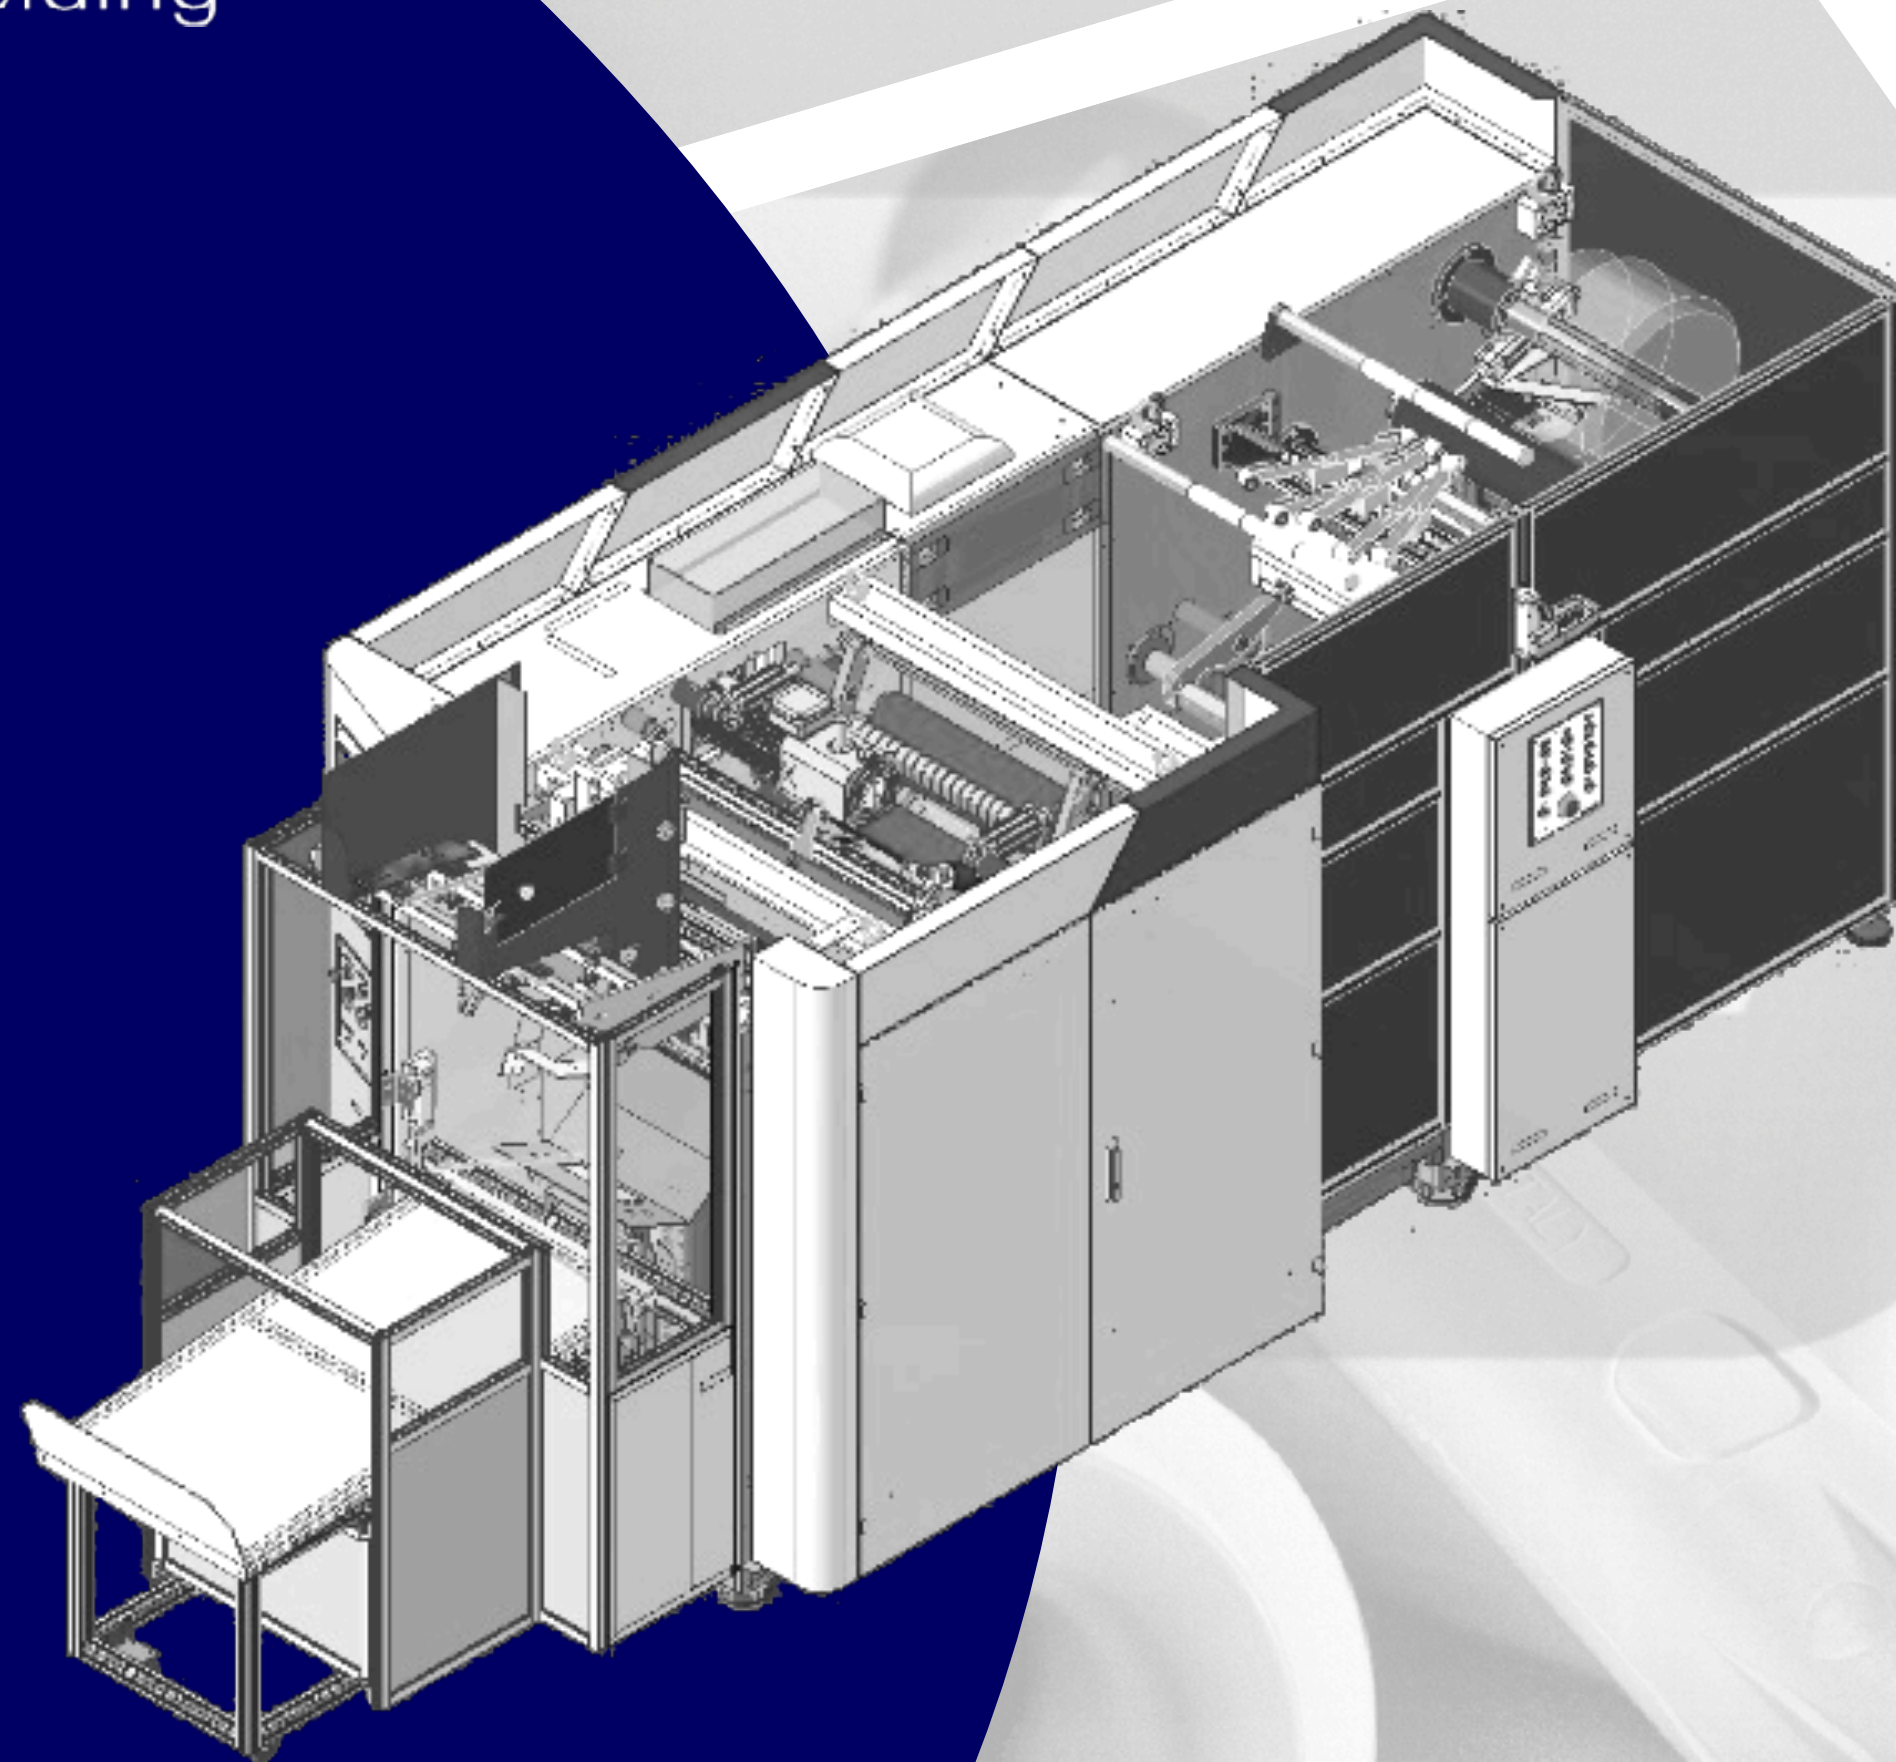

LIFETIME
ASSISTANCE

NO.EL. S.r.l.
Via Giacomo Leopardi 30
San Pietro Mosezzo (NO) - ITALY
+39 0321468726
noel-automation.com
noel@noel-automation.it

IN-LINE

CORELESS

PRESTRETCH

MDO

CORELESS

PRESTRETCH

CONVENTIONAL

SLITTER

VENTED & REINFORCED

PRE 500 MULTI

PRE 1001 HP

HP 500/250
CORELESS

PRE 501 3R

RIBO
501/701 HP

MP PRE 501 4R

PRE 500 2R

PRE 1000 3R

RIBO 500 HP

